

Operating Instructions (Continued)

**Modem/Fax Line Connection**

1. Be sure your 220-240 volt device is turned off.
2. Connect the foreign phone line into the RJ11 jack labeled "Phone Line". (See figure 1) Note: An International Phone Adaptor may be needed. Connect the modem/fax line into the RJ11 jack labeled "To Modem". Two phone cords with RJ11 connectors (not included) may be needed to connect the foreign phone line and the modem/fax line.

**ONE YEAR WARRANTY**

We guarantee each new EuroSurge™ to be free from defects in material or workmanship and to perform under normal use and service. This guarantee shall run for a period of one year from the date of purchase, and obligations under this guarantee are limited to remedying any defect or replacing any defective product and shall be effective only if the defective unit is returned to us within 12 months after purchase. Damage due to abuse, misuse, or overloading is not covered by this guarantee. We shall not be responsible for any other loss or damage that may arise through the use by a purchaser or others of this device, and the purchaser assumes such responsibility and will hold Hybrinetics, Inc. harmless in respect to all such loss or damage.

**Important: This is a factory direct warranty. Do not return defectives to your retailer. All defectives must be returned to the factory accompanied by a sales receipt with the original date of purchase. For more information please call our toll free number: (800) 247-6900.**

**Voltage Valet Division, Hybrinetics, Inc.**  
225 Sutton Place, Santa Rosa, CA 95407

©1997 Hybrinetics, Inc.

**VOLTAGE VALET™**  
**EuroSurge™**  
220-240 Volt Surge Protector  
Portable Surge Protection for World Travelers  
Model SP2



**Instruction Manual**

Read instructions before using this appliance

The EuroSurge™ provides AC power and data line surge protection for your 220-240 volt ready electronic devices while traveling in foreign countries with 220-240 volt power sources.

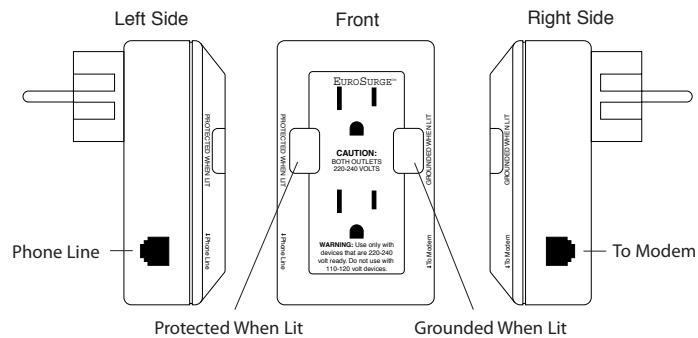


Figure 1

#### SPECIFICATIONS

AC Input/Output	220-240 VAC 50/60 Hz.
AC Power Rating	8 Amps (1920 watts total)
Protected AC Outlets	2
AC Input Plug	Schuko CEE 7/7
AC Output Receptacles	NEMA 5/15
Joule Rating	1200
Surge Current	42,000 Amps
Response Time	1 Nanosecond
EMI/RFI Filtering	55 dB
Operation Indicators	Visual
Protected Modem/Fax Line	1
Modem/Fax Connectors	RJ11
Tax Impulse Filter	Yes

#### READ ALL INSTRUCTIONS BEFORE USING

**WARNING! EUROSURGE™ OUTPUT IS 220-240 VAC  
DO NOT USE WITH 110/120 VAC DEVICES!**

Be sure your electronic device is 220-240 volt ready. This information is located in the specifications section of your operating manual or on the manufacturer's label located on the bottom or back of your device as "Input Voltage". Devices with auto ranging 100-240 VAC power supplies do not have a voltage selector switch and are 220-240 volt ready. Multi-voltage devices with a 110/220 or 120/240 VAC voltage selector switch must be set to the 220-240 volt position.

#### OPERATING INSTRUCTIONS

##### AC Power Connection

1. Be sure your 220-240 volt device is turned off.
2. Plug the EuroSurge™ into the 220-240 volt foreign wall outlet.  
NOTE: A grounded EuroSurge™ adaptor plug may be needed.
3. Check the indicator lights (See figure 1):
  - If BOTH the PROTECTED WHEN LIT and GROUNDED WHEN LIT lights are on, the EuroSurge™ is operating normally.
  - If the GROUNDED WHEN LIT light is out, there is no ground connection. AC power is available but the surge protection circuit is NOT active. Try another outlet.
  - If the PROTECTED WHEN LIT light is out, the circuit has absorbed a large power surge. AC power is available but the surge protection circuit is NOT active. Replace unit.
4. If both indicator lights are lit plug the AC power cord of your 220-240 volt ready device into either AC power outlet on the EuroSurge™. You may connect two 220-240 volt ready devices simultaneously. Do not exceed the 8 amp maximum total rating.